




Eliminate Costly Installations and Downtime


Pyrotek Ceramite® Floor Tiles

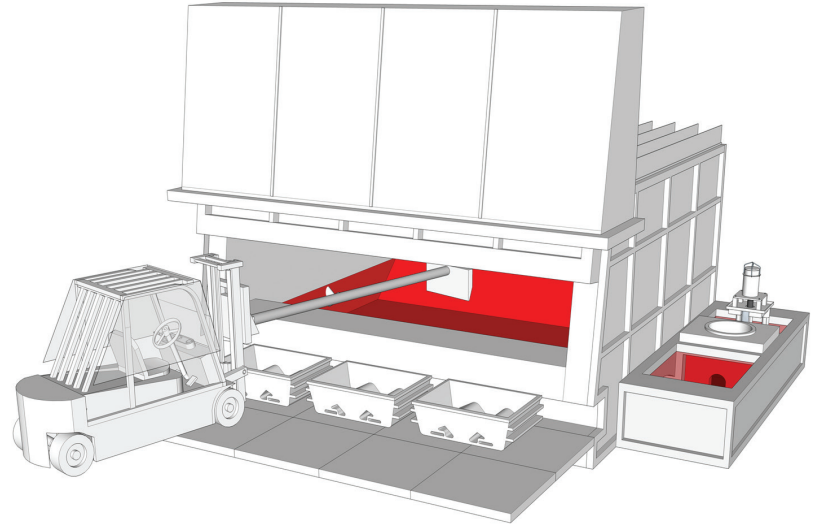

With proven aluminium expertise, from the smelter to the foundry, Pyrotek offers many refractory options, including Ceramite, which is optimized for cast parts in high-temperature, high-wear areas.

Pyrotek floor tiles, made with Ceramite refractory material, are a more robust alternative to other industrial flooring on the market and have proven to last decades.

- Low porosity, maintains strength when compressed and at extreme temperatures
- Ideal for anywhere molten aluminium is likely to spill
- Protects flooring from vehicle and equipment wear
- Stays smooth with wear, doesn't pit or break from mechanical abuse
- Some Ceramite tiles installed 20 years ago are still in place
- Four standard sizes, can customize as needed

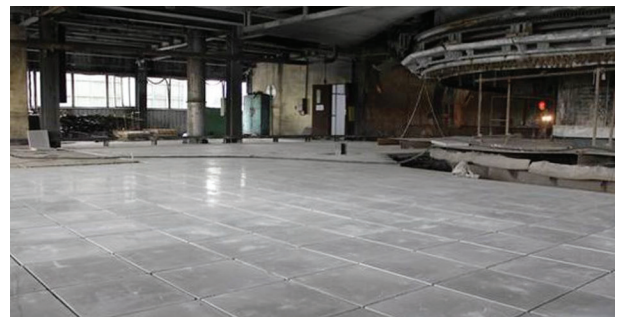

Pyrotek Ceramite Floor Tiles

Part ID	Dimensions
P046-000073	485 x 485 x 45 mm (19.1 x 19.1 x 1.8 in)
P046-000025	485 x 485 x 60 mm (19.1 x 19.1 x 2.4 in)
P046-000093	970 x 970 x 60 mm (38.2 x 38.2 x 2.4 in)
P046-000279	1500 x 1000 x 75 mm (59.1 x 39.4 x 3.0 in)

Why Pyrotek?

Our global network of field engineers work with aluminium producers to determine the best materials, products and designs to suit their needs.

For more information about Pyrotek Ceramite refractory and its applications, contact your local sales engineer.

