



120 Valley Court
Oak Ridge, TN 37830
Ph: 865-482-5717
FAX: 865-482-1281
zypcoatings.com

Z Aerosol Brushable (Zirconium Oxide)

Solvent-based, Bulk Paint -- Same Formulation used in Z-Aerosol can

ZYP Coating's "Z Aerosol Brushable" is the same formulation that is used in our Z Aerosol spraycan ... but is in BULK (paint) form, sold by the gallon. The Z Aerosol Brushable can be applied by brushing, traditional air-spraying means, or dipping. Usable in any environment from room temperature to 1900 C (3450F). Z Aerosol Brushable can be diluted with Acetone for somewhat faster drying or with Ethyl Alcohol for somewhat slower drying.

Key Attributes

- Fast Drying, Solvent Based
- Easy-to use
- Dilutable with Acetone and/or Ethanol
- Apply like housepaints

Ideal Use


- Precious metal melting/casting
- Reactive metal separator layer

Use Notes

1. Resuspend if needed.
2. Clean surfaces to be painted of any oils dirt, scale, etc.
3. Apply one thin layer by brush, dip or air-spray
4. Allow to dry at room temperature. before use. Generally less than 5 minutes. Recoat if needed.

Safety Information

- Consult MSDS before use.
- Avoid breathing of vapors.
- For Industrial use only.

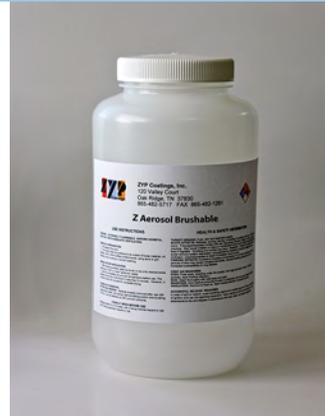

Specifications

| | |
|----------------------------------|---|
| Active Ingredient | ZrO ₂ * |
| Max Use Temperature | Air/Inert/Vac, without C present 3450 F / 1900 C |
| | Vac, with C present 2730 F / 1500 C |
| Use Atmosphere | All |
| Fired Composition(Air@700 C) | >98% ZrO ₂ * |
| Liquid Carrier | Ethanol/Acetone |
| Binder Phase | Magnesium Silicate |
| Brookfield Viscosity (cps) | 425 @2/60 |
| Specific Gravity | 1.5 |
| Color | Cream |
| Shelf Life (months) | >12 |
| Coverage (ft ² /gal.) | 100-400 |
| H F R Ratings | 2-3-0 |
| Substrate Use | All |
| Other: | Nearly water insoluble after drying * with 4 wt% CaO |

Sizes and colors

Product is cream-colored: will gray out on first heat up to 700 C due to small amount of organic binder.

Standard Size: 1 gallon wide-mouth Nalgene container

ZYP Coatings, Inc. (ZYP) makes no warranties, express or implied, including the warranty of merchantability or fitness for a particular service. Product is for industrial/commercial use only. Users should determine suitability for their use. In no event will ZYP be liable for any direct, indirect, incidental, special or consequential damages or losses including, but not limited to loss of profits, in any way related to this product regardless of the legal theory asserted.